

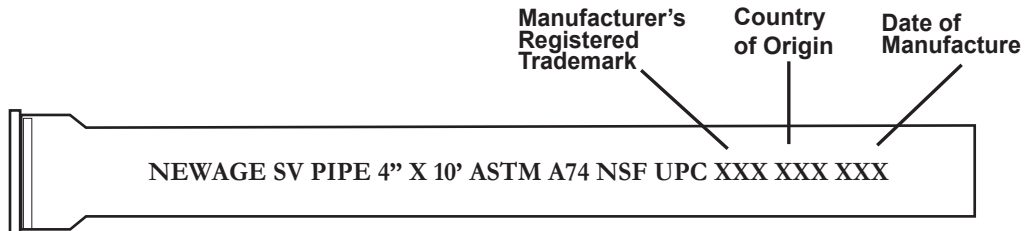


CAST IRON HUB AND SPIGOT SOIL PIPE AND FITTING SUBMITTAL




NOM SIZE.	INSIDE DIAMETER HUB		INSIDE DIAMETER BARREL			OUTSIDE DIA. OF BARREL			THICKNESS OF BARREL		TELESCOPING LENGTH	
	A		B		C	J		T-NOM	T-MIN	Y		
2	2.94	±0.06	1.96	±0.09	3.62	2.30	±0.09	0.17	0.14	2.50	±0.06	
3	3.94	+0.09 -0.06	2.96	±0.09	4.68	3.30	±0.09	0.17	0.14	2.75	±0.06	
4	4.94	+0.09 -0.06	3.94	±0.09	5.68	4.30	±0.09	0.18	0.15	3.00	±0.06	
5	5.94	+0.09 -0.06	4.94	±0.09	6.68	5.30	±0.09	0.18	0.15	3.00	±0.06	
6	6.94	+0.09 -0.06	5.94	±0.09	7.68	6.30	±0.09	0.18	0.15	3.00	±0.06	
8	9.25	±0.13	7.94	±0.13	10.13	8.38	±0.13	0.23	0.17	3.50	±0.13	
10	11.38	±0.13	9.94	±0.13	12.44	10.50	±0.13	0.28	0.22	3.50	±0.13	
12	13.50	±0.13	11.94	±0.19	14.56	12.50	±0.19	0.28	0.22	4.25	±0.19	
15	16.95	±0.13	15.16	±0.19	18.11	15.88	±0.19	0.36	0.30	4.25	±0.19	


- Certified to conform to ASTM A74, most recent revision, Standard Specification for Cast Iron Soil Pipe and Fittings.
- NewAge Casting Service weight joints are joined by lead and oakum or compression gasket which conform to ASTM C564.
- Foundries are **ISO9001** CERTIFIED
- NewAge Soil Pipe Products No-Hub Cast Iron Soil Pipe and Fittings certified by -

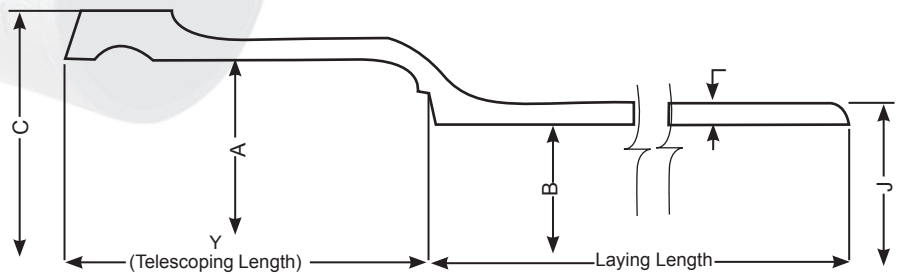


Short Sweep Bend - 90°




Sanitary Tee



P-Trap



Wye



Combination WYE and 1/8 Bend