






CAST IRON HUBLESS SOIL PIPE AND FITTING SUBMITTAL

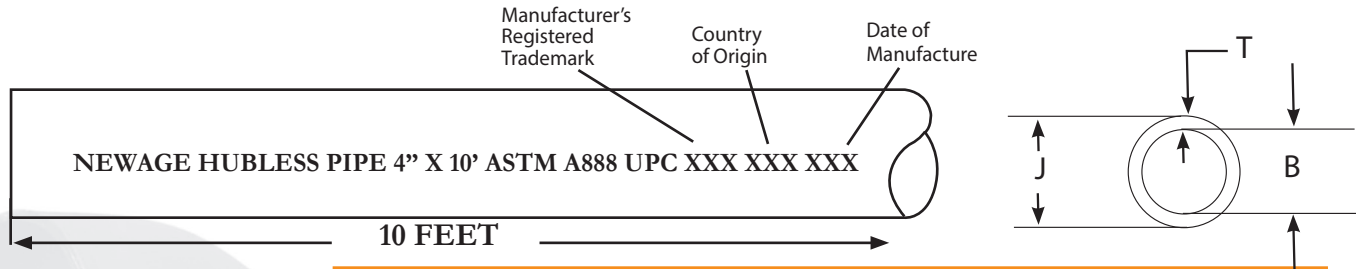


NO-HUB PIPE 10 FEET				
NOM	B	J	T	
SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	NOM.	MIN.
1 1/2	1.50 ± 0.09	1.90 ± 0.06	0.16	0.13
2	1.96 ± 0.09	2.35 ± 0.09	0.16	0.13
3	2.96 ± 0.09	3.35 ± 0.09	0.16	0.13
4	3.94 ± 0.09	4.38 ± 0.09	0.19	0.15
5	4.94 ± 0.09	5.30 ± 0.09	0.19	0.15
6	5.94 ± 0.09	6.30 ± 0.09	0.19	0.15
8	7.94 ± 0.13	8.38 ± 0.09	0.23	0.17
10	10.00 ± 0.13	10.56 ± 0.09	0.28	0.22
12	11.94 ± 0.13	12.50 ± 0.13	0.28	0.22
15	15.11 ± 0.13	15.83 ± 0.13	0.36	0.30

- Certified to conform to ASTM A 888, most recent revision, Standard Specification for Hubless Cast Iron Soil Pipe and Fittings.
- Certified to conform to CISPI 301 Standard Specification for Hubless Cast Iron Soil Pipe and Fittings.
- Foundries are **ISO 9001** CERTIFIED
- NewAge Soil Pipe Products Hubless Cast Iron Soil Pipe and Fittings certified by:
  - UPC 


ICC-ES-PMC  
IPC 




Double Quarter Bend



P-Trap  
w/1/2" Primer Tap



San Cross

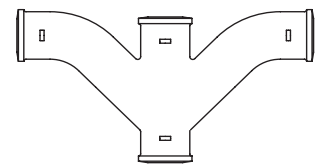

Double Combination  
Wye & 1/8" Bend