



**NEWAGE EPOXY SUBMITTAL**





NO-HUB PIPE 10 FEET				
NOM	B	J	T	
SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	NOM.	MIN.
1 1/2	1.50 ± 0.09	1.90 ± 0.06	0.16	0.13
2	1.96 ± 0.09	2.35 ± 0.09	0.16	0.13
3	2.96 ± 0.09	3.35 ± 0.09	0.16	0.13
4	3.94 ± 0.09	4.38 ± 0.09	0.19	0.15
5	4.94 ± 0.09	5.30 ± 0.09	0.19	0.15
6	5.94 ± 0.09	6.30 ± 0.09	0.19	0.15
8	7.94 ± 0.13	8.38 ± 0.09	0.23	0.17
10	10.00 ± 0.13	10.56 ± 0.09	0.28	0.22
12	11.94 ± 0.13	12.50 ± 0.13	0.28	0.22
15	15.11 ± 0.13	15.83 ± 0.13	0.36	0.30

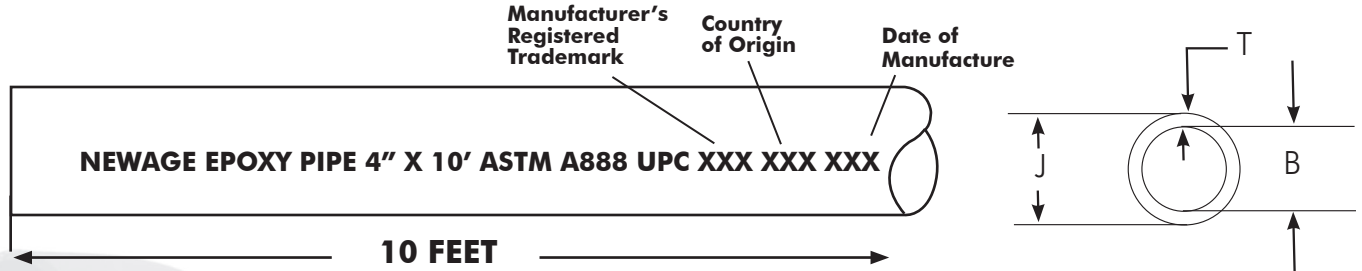


**Quarter Bend**




**Wye**


- Certified to conform to ASTM A 888, most recent revision, Standard Specification for Hubless Cast Iron Soil Pipe and Fittings.
- Certified to conform to CISPI 301 Standard Specification for Hubless Cast Iron Soil Pipe and Fittings.
- Foundries are **ISO9001** CERTIFIED
- NewAge Soil Pipe Products No-Hub Cast Iron Soil Pipe and Fittings certified by --  
 UPC   
 IPC 
- Two part epoxy spray on coating shall have 2.5 mil minimum exterior thickness and 5 mil minimum interior thickness for superior adhesion, chemical (acidic and alkali) resistance, durability, fire resistance, heat resistance and superior flow characteristics.
- Two part epoxy is tested to be non reactive from 2pH – 12pH. The epoxy coating will not sag, cold flow or become soft. The two part epoxy resists cavitation and cathodic disbondment.




**Double Quarter Bend**



**P-Trap w/1/2" Primer Tap**



**San Cross**



**Double Combination Wye & 1/8" Bend**