



MULTI-SEAL HUB & SPIGOT COMPRESSION GASKET SUBMITTAL

Welcome to the NewAge

12630 West Airport Blvd., Suite 100 • Sugar Land, Texas 77478 • Phone: 281.565.0928 • E-Mail: info@newagecasting.com • Web: www.newagecasting.com

MULTI-SEAL COMPRESSION GASKET SUBMITTAL

EASILY INSTALLS INTO THE BELOW PRODUCT LINE:

- Hub & Spigot

DESCRIPTION:

NewAge multi-seal is a one piece compression gasket. It is used for joining hub and spigot cast iron soil pipe and fittings made according to ASTM A74.

GASKET SPECIFICATION:

NewAge multi-seal gaskets conform to ASTM Standard C 564 and ASTM Standard C1563, most recent revision.

BRACING:

To prevent movement, horizontal pipe and fittings 5" and larger should be suitably braced by the use of blocks, rods or other suitable methods at every branch or change of direction. Applicable local codes should be followed.

TEST:

For best results, test one floor [ten feet] at the time. If more than one floor at a time is tested, the system should be properly restrained; all bends, changes of directions, and end of runs should be restrained.


Gasket Material:

NewAge Multi-Seal Gasket are made of Neoprene as the sole elastomer. The physical characteristics of the Neoprene ensure that the gasket will not decay or deteriorate from contact with effluents in the pipe or chemical in the soil or air around the pipe.

PART #	SIZE	UNIT WT	CARTON QTY	CARTON WT
SVGMS200	2"	0.27	150	40
SVGMS300	3"	0.39	75	29
SVGMS400	4"	0.50	60	30
SVGMS500	5"	0.77	30	23
SVGMS600	6"	0.87	30	26
SVGMS800	8"	1.70	20	34
SVGMS1000	10"	2.50	10	25
SVGMS1200	12"	3.10	10	31
SVGMS1500	15"	4.60	5	23

HOW TO SPECIFY

All hub and spigot cast iron soil pipe and fittings shall conform to ASTM A74; joints shall be made by compression gaskets that conform to ASTM C564.

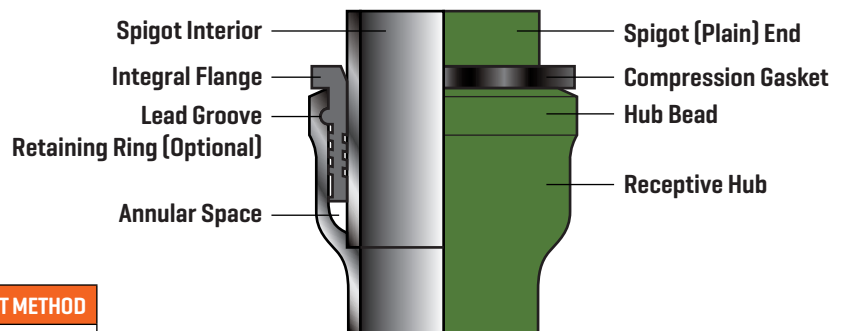

PHYSICAL PROPERTIES

PROPERTY	PERFORMANCE REQUIRED	ASTM TEST METHOD
Hardness Shore A	60 + 5	D2240
Elongation, min, percent	300	D412
Tensile strength, min, psi	1500	D412
Tear resistance, min, lbf/in.	150	D624
Compression set, max, percent	25	D395
Heat aging, 96h at 158° ± 2° F	-	D573
Hardness, increase, max	10	-
Loss in tensile strength, max, %	15	-
Loss in elongation, max, %	20	-
Water absorption	-	D471
Weight increase, max, %	20	-
Ozone resistance	No cracks	D1149

